


Project Planning Sheet


Linear guideway PG

Company:

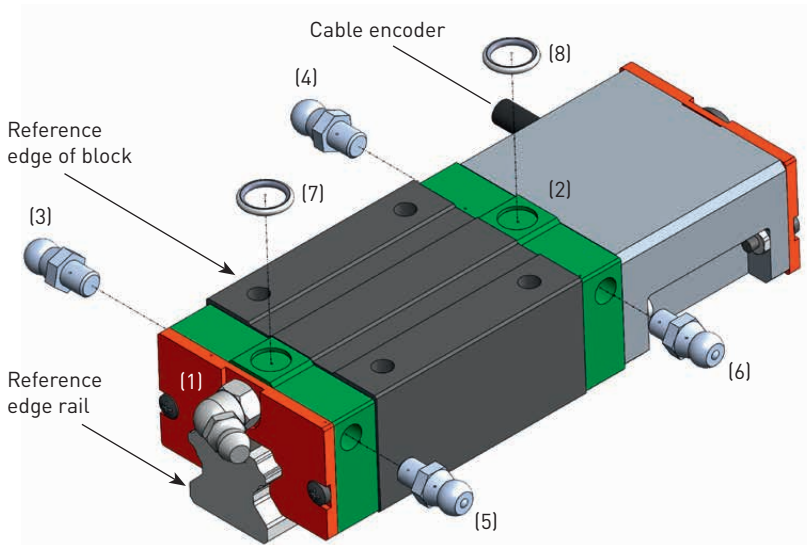

Selection:

- Position lubrication connection
 - Pos. 1, 2: Frontside lubrication
 - Pos. 3, 4, 5, 6: Side lubrication
 - Pos. 7, 8: Lubrication from above
- Cable position encoder
- Standard (solid line)
- - - Optional (dashed line)

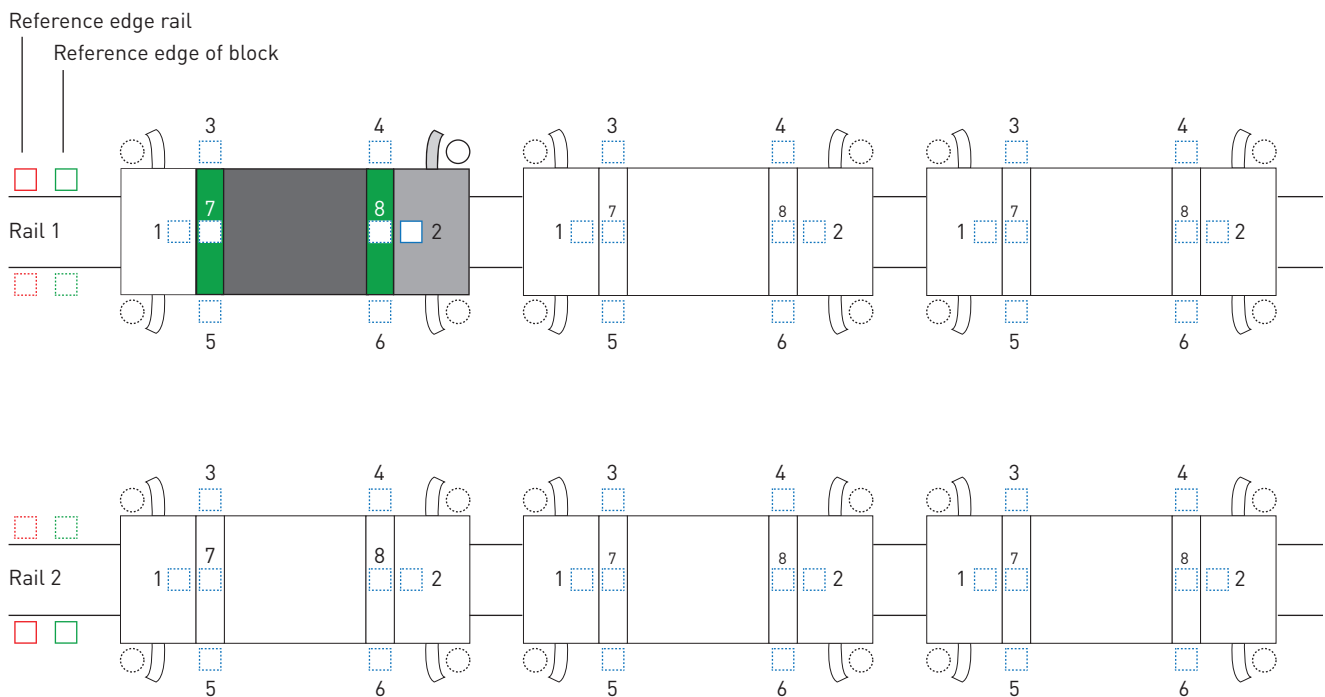

If the $E_{1/2}$ dimensions are not indicated, the maximum possible number of mounting holes will be determined under consideration of $E_{1/2}$ min and will be carried out symmetrically.

Without specifying the following standard lubrication adapters will be used.

- Frontside lubrication (Pos. 1, 2): $M6 \times 0,75 \times 67,5^\circ$
- Side lubrication (Pos. 3, 4, 5, 6): $M6 \times 0,75 \times 0^\circ$

For multi-part butt joint rails please provide the single length of each rail and the required E_1 and E_2 values.